

Code E6

Situation: Incorrect heating and filtering, buzzer warning.

Cause: The water pressure is not enough to start heating.

Reason 1: The water inlet and outlet on the inner wall are blocked.

Solution 1: Clean the water inlet and outlet




Reason 2: The filter is too dirty.

Solution 2: Clean or replace the filter



Reason 3: The pool water has not reached the minimum water level.

Solution 3: Add water to the water level.

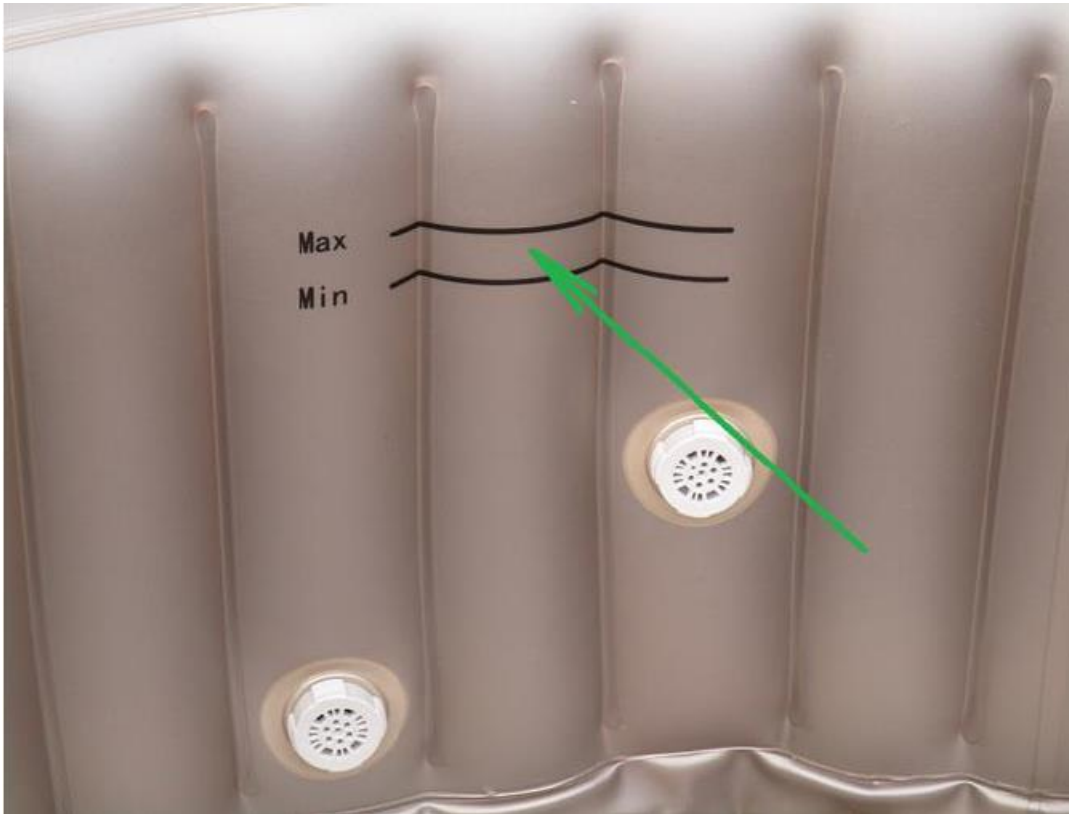

Reason 4: The hose connecting the inside and outside of the Liner is not straightened, or the hose is flattened, which reduces the water flow speed.

Solution4: Pump the Liner with enough air again, which will straighten the hose connecting the inside and outside of the Liner. If it fails, replace a new liner.

